


# Leica DISTO™ D1

Experience the difference!

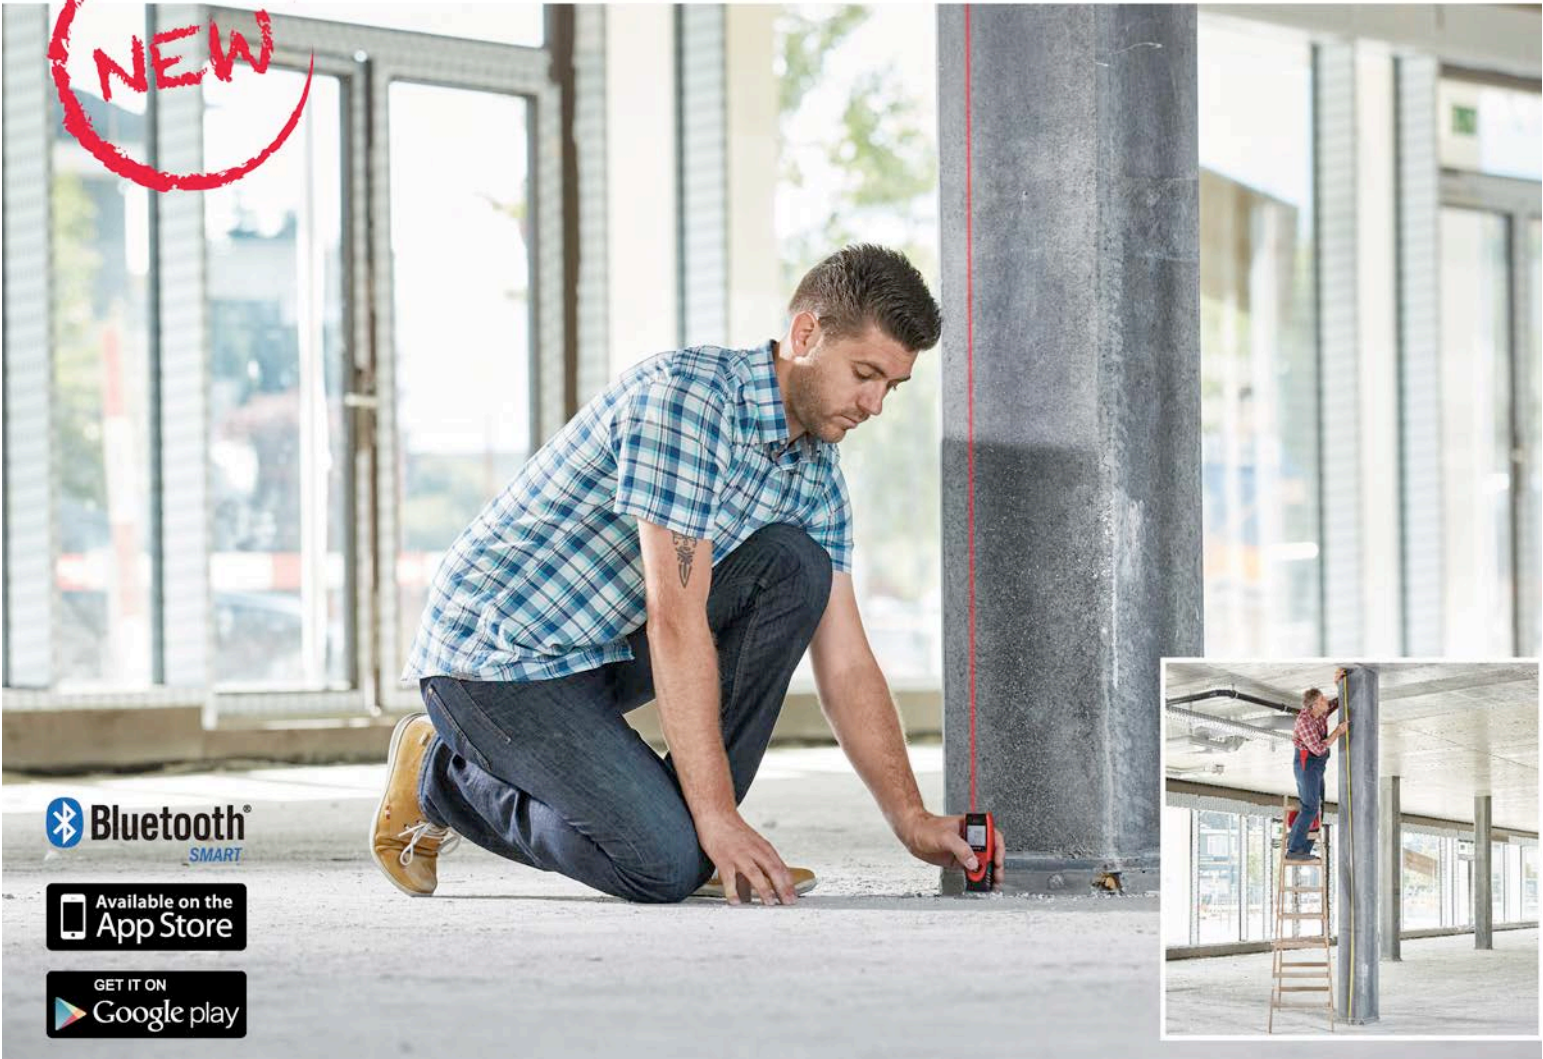

## Handy, simple, precise!

At the touch of a button the Leica DISTO™ D1 measures heights, distances as well as niches quickly and reliably. Complicated or dangerous measurement situations, where ladders may be necessary, are now in the past.

The functionality of the DISTO™ D1 can be extended with the Leica DISTO™ sketch app. With this app you can transfer measuring results to smart phones or tablets, process and forward them.

### Featured with:

- Bluetooth® Smart for data transfer to smart phones and tablets
- Free App Leica DISTO™ sketch
- 40 m range
- X-Range Power Technology
- Clear, illuminated 3 line display
- IP 54 dust and splash water protected

- when it has to be **right**

**Leica**  
Geosystems



### Measure with laser precision

At the touch of a button the Leica DISTO™ D1 measures precisely and reliably even over longer distances. It is easy to operate and can hit targets which are not directly accessible.



### Just precise

One measurement is sufficient and the result can be easily read off the clearly arranged display. Adding subtotals, e.g. when measuring a niche, is no longer necessary.



### Perfect documentation

With just a few clicks, the Leica DISTO™ D1 can be connected with the DISTO™ sketch app. Create sketches or photos and dimension them with the measurement results, which are transferred directly to your smart phone or tablet. Plans are even automatically completed with areas and circumferences.



### Quality from the Pioneer

The compact, easy-to-use Leica DISTO™ D1 demonstrates the experience of many years and the quality from Leica Geosystems, the leading manufacturer of measuring devices.



### Leica DISTO™ D1

Art. No. 843418

- Leica DISTO™ D1 laser distance meter
- Batteries

### Technical Data

Accuracy, typ.	± 2,0 mm
Range	0.2 – 40 m
Measuring units	m, ft, in
X-Rang Power Technology	●
Display illumination	●
Free App	iOS, Android
Data interface*	Bluetooth® Smart
Battery life time**	up to 10'000 measurements, up to 20h of operation
Batteries	type AAA, 2 x 1,5 V
Protection class	IP 54
Dimensions	115 x 43,5 x 23,5 mm
Weight with batteries	87 g

\*) System requirements and details at [www.disto.com](http://www.disto.com)

\*\*) Reduced in Bluetooth® Smart mode

### Functions

Distance measurement	
Tracking	

All illustrations, descriptions and technical specifications are subject to change without prior notice. Printed in Switzerland. Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2016



IEC 60825-1



Register your device within 8 weeks of purchase at [www.leica-geosystems.com/registration](http://www.leica-geosystems.com/registration) and extend your no cost period to 3 years.

For further information please call or email us



**Measuring, levelling  
and layout solutions  
for all trades**

Mining - Aligning - Engineering - Environmental - Civil Construction  
Surveying - Geological - Glass Testing - Speed Detection

**GSR Laser Tools**  
Unit 7 / 7 Prindiville Drive  
Wangara WA 6065  
Ph: 08 9409 4058  
[sales@gslasertools.com.au](mailto:sales@gslasertools.com.au)  
[www.gslasertools.com.au](http://www.gslasertools.com.au)

