

FEEDBACK DATA LOGGER

TEMPERATURE AND RELATIVE HUMIDITY
DL- RHTA



The Tramex Feedback DataLogger and App have been designed and developed by Tramex for professionals who depend on accurate, reliable readings using the very best, state of the art technology. The Feedback DataLogger and App log up to 100,000 data point entries for relative humidity, temperature, dew point and grains per pound, transmitted wirelessly via Bluetooth BLE technology to your mobile device. On the App you can visualise Live Readings, Thermal Conditions and Psychrometric Charts as well as creating and exporting spreadsheets, charts and reports. The Tramex Feedback DataLogger requires the Tramex Feedback Data Logger App and a compatible iOS or Android mobile device.

FEATURES

- Bluetooth BLE enabled for use with mobile devices.
- Up to 100,000 data point entries.
- Instant set up and start modes.
- Precise Ambient Relative Humidity and Temperature logging.
- Intuitive and instructive App interface.
- Adjustable Interactive chart, spreadsheet, report and easy-export functions.
- Connectivity up to 165ft (50 meters) for highly accessible data downloads.



Tramex Feedback
DataLogger App
For use with Tramex
DL-RHTA and DL-RHTX
Dataloggers.

Available on:



Product order code: DL-RHTA

DL-RHTA-US 04/18 REV.1.0



SUPPORTED MEASUREMENTS

- Ambient Relative Humidity, Temperature, Dew point, Grains per pound.
- Psychrometric chart showing Relative Humidity, Specific Volume, Wet Bulb Temperature, Dry Bulb Temperature, Enthalpy, Humidity Ratio, Dew Point.
- Contact Temperature, Estimated contact RH, Ambient Dew Point, Contact Delta Temperature (with optional contact Temperature Probe)

DATALOGGER SPECIFICATIONS

With built-in Ambient RH + Temperature sensor; Plug-in Contact Temp Probe (optional) providing the best available accuracy tolerances of 1.5%RH & 0.1°F.

Size:	3.94" x 3.54" x 1.38" (100mm x 90mm x 35mm)
Weight:	3.53oz (100g)
Construction:	ABS enclosure
Power:	1 x AA type battery 1.5 Volt
Memory:	100,000 data point entries (samples of Ambient RH and temperature; Surface Temperature)
Logging Rate:	Logger interval adjustable between 5 minutes and 1 hour
Transmission Range:	Up to 165ft (50m) line-of-sight
Bluetooth:	BLE Bluetooth Low Energy 4.2 compliant, Bluetooth 5 advertising
Included:	Wall Mounting and Tripod Stand

HUMIDITY AND TEMPERATURE SPECIFICATIONS

RELATIVE HUMIDITY SENSOR SPECIFICATIONS

Range:	0 to 100%RH
Accuracy:	±1.5%RH Range 0% to 80%RH ±2.0%RH Range 80% to 99%RH (@ 77°F (25°C))
Resolution:	0.1% over the complete range
Drift:	<0.25%RH per year


TEMPERATURE SENSOR SPECIFICATIONS:

Range:	-40°F to 257°F (-40°C to 125°C)
Accuracy:	±0.1°F Range 68°F to 140°F (±0.1 °C Range 20°C to 60°C)
Sensor Protection:	PTFE Film protects sensor opening from water & dust
Drift:	<0.04°F (0.03°C) per year


CONTACT TEMPERATURE PROBE (OPTIONAL)

Units:	°F (°C)
Temperature Range:	-20°F to +175°F (-30°C to +80°C)
Accuracy:	±0.9°F from 14°F to 185°F (±0.5°C from -10°C to +85°C)
Resolution:	0.1% over the complete range


Live Readings

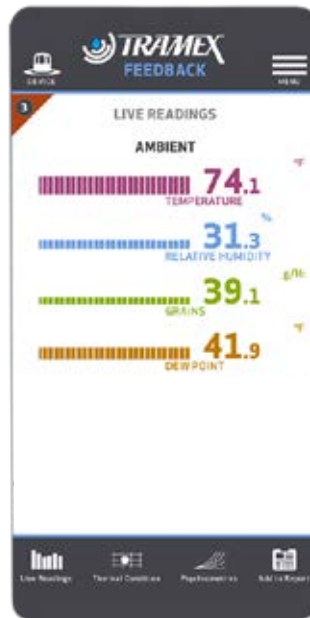


Thermal Condition

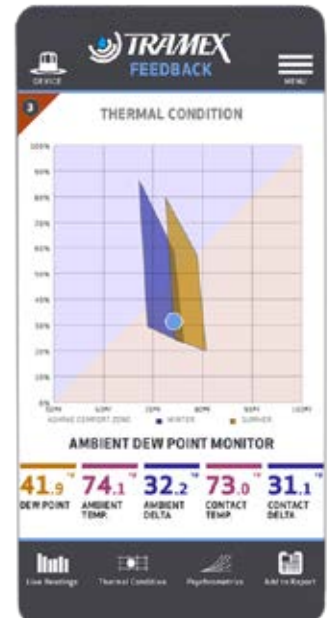

Psychrometric Chart

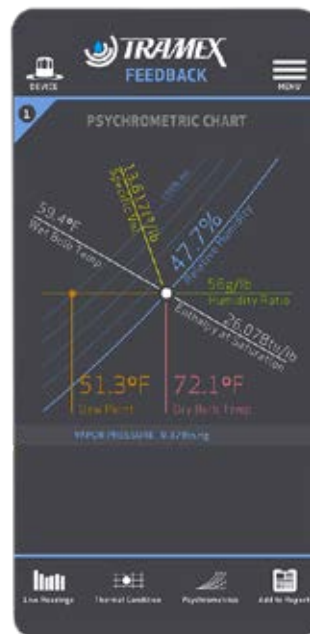

Available Devices

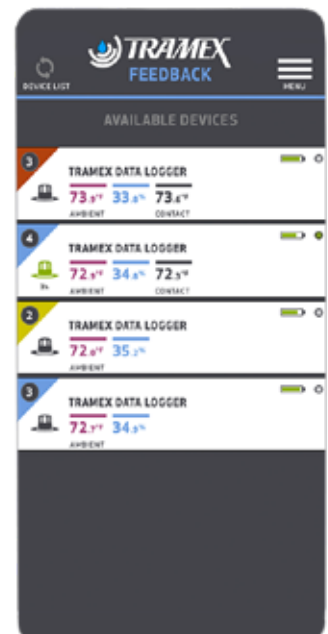

BATTERY

Power supply: 1 x AA type battery 1.5 Volt
Battery life: Over 1 year based on logging intervals of 5mins, using an alkaline battery with a nominal voltage of 1.5V as supplied.

CERTIFICATION

CE: EN 61326-1
 FCC: Part 15-J
 ROHS Compliant





Measuring, levelling and layout solutions for all trades

Mining - Aligning - Engineering - Environmental - Civil Construction
 Surveying - Geological - Glass Testing - Speed Detection

GSR Laser Tools
 Unit 7 / 7 Prindiville Drive - Wangara WA 6065
 PH: 08 9409 4058
sales@gsrlasertools.com.au - www.gsrlasertools.com.au